


A stylized graphic of a flame, composed of several thick, curved, overlapping bands. The top portion is a vibrant blue, which transitions through green and yellow to a bright orange and red at the bottom. The bands are separated by thin white lines, creating a sense of movement and depth. The overall shape is reminiscent of a flame rising from the bottom right towards the top left.

Novec™ 1230 Fire Protection Fluid.

Created for life.

3M Novec™ 1230
Fire Protection Fluid

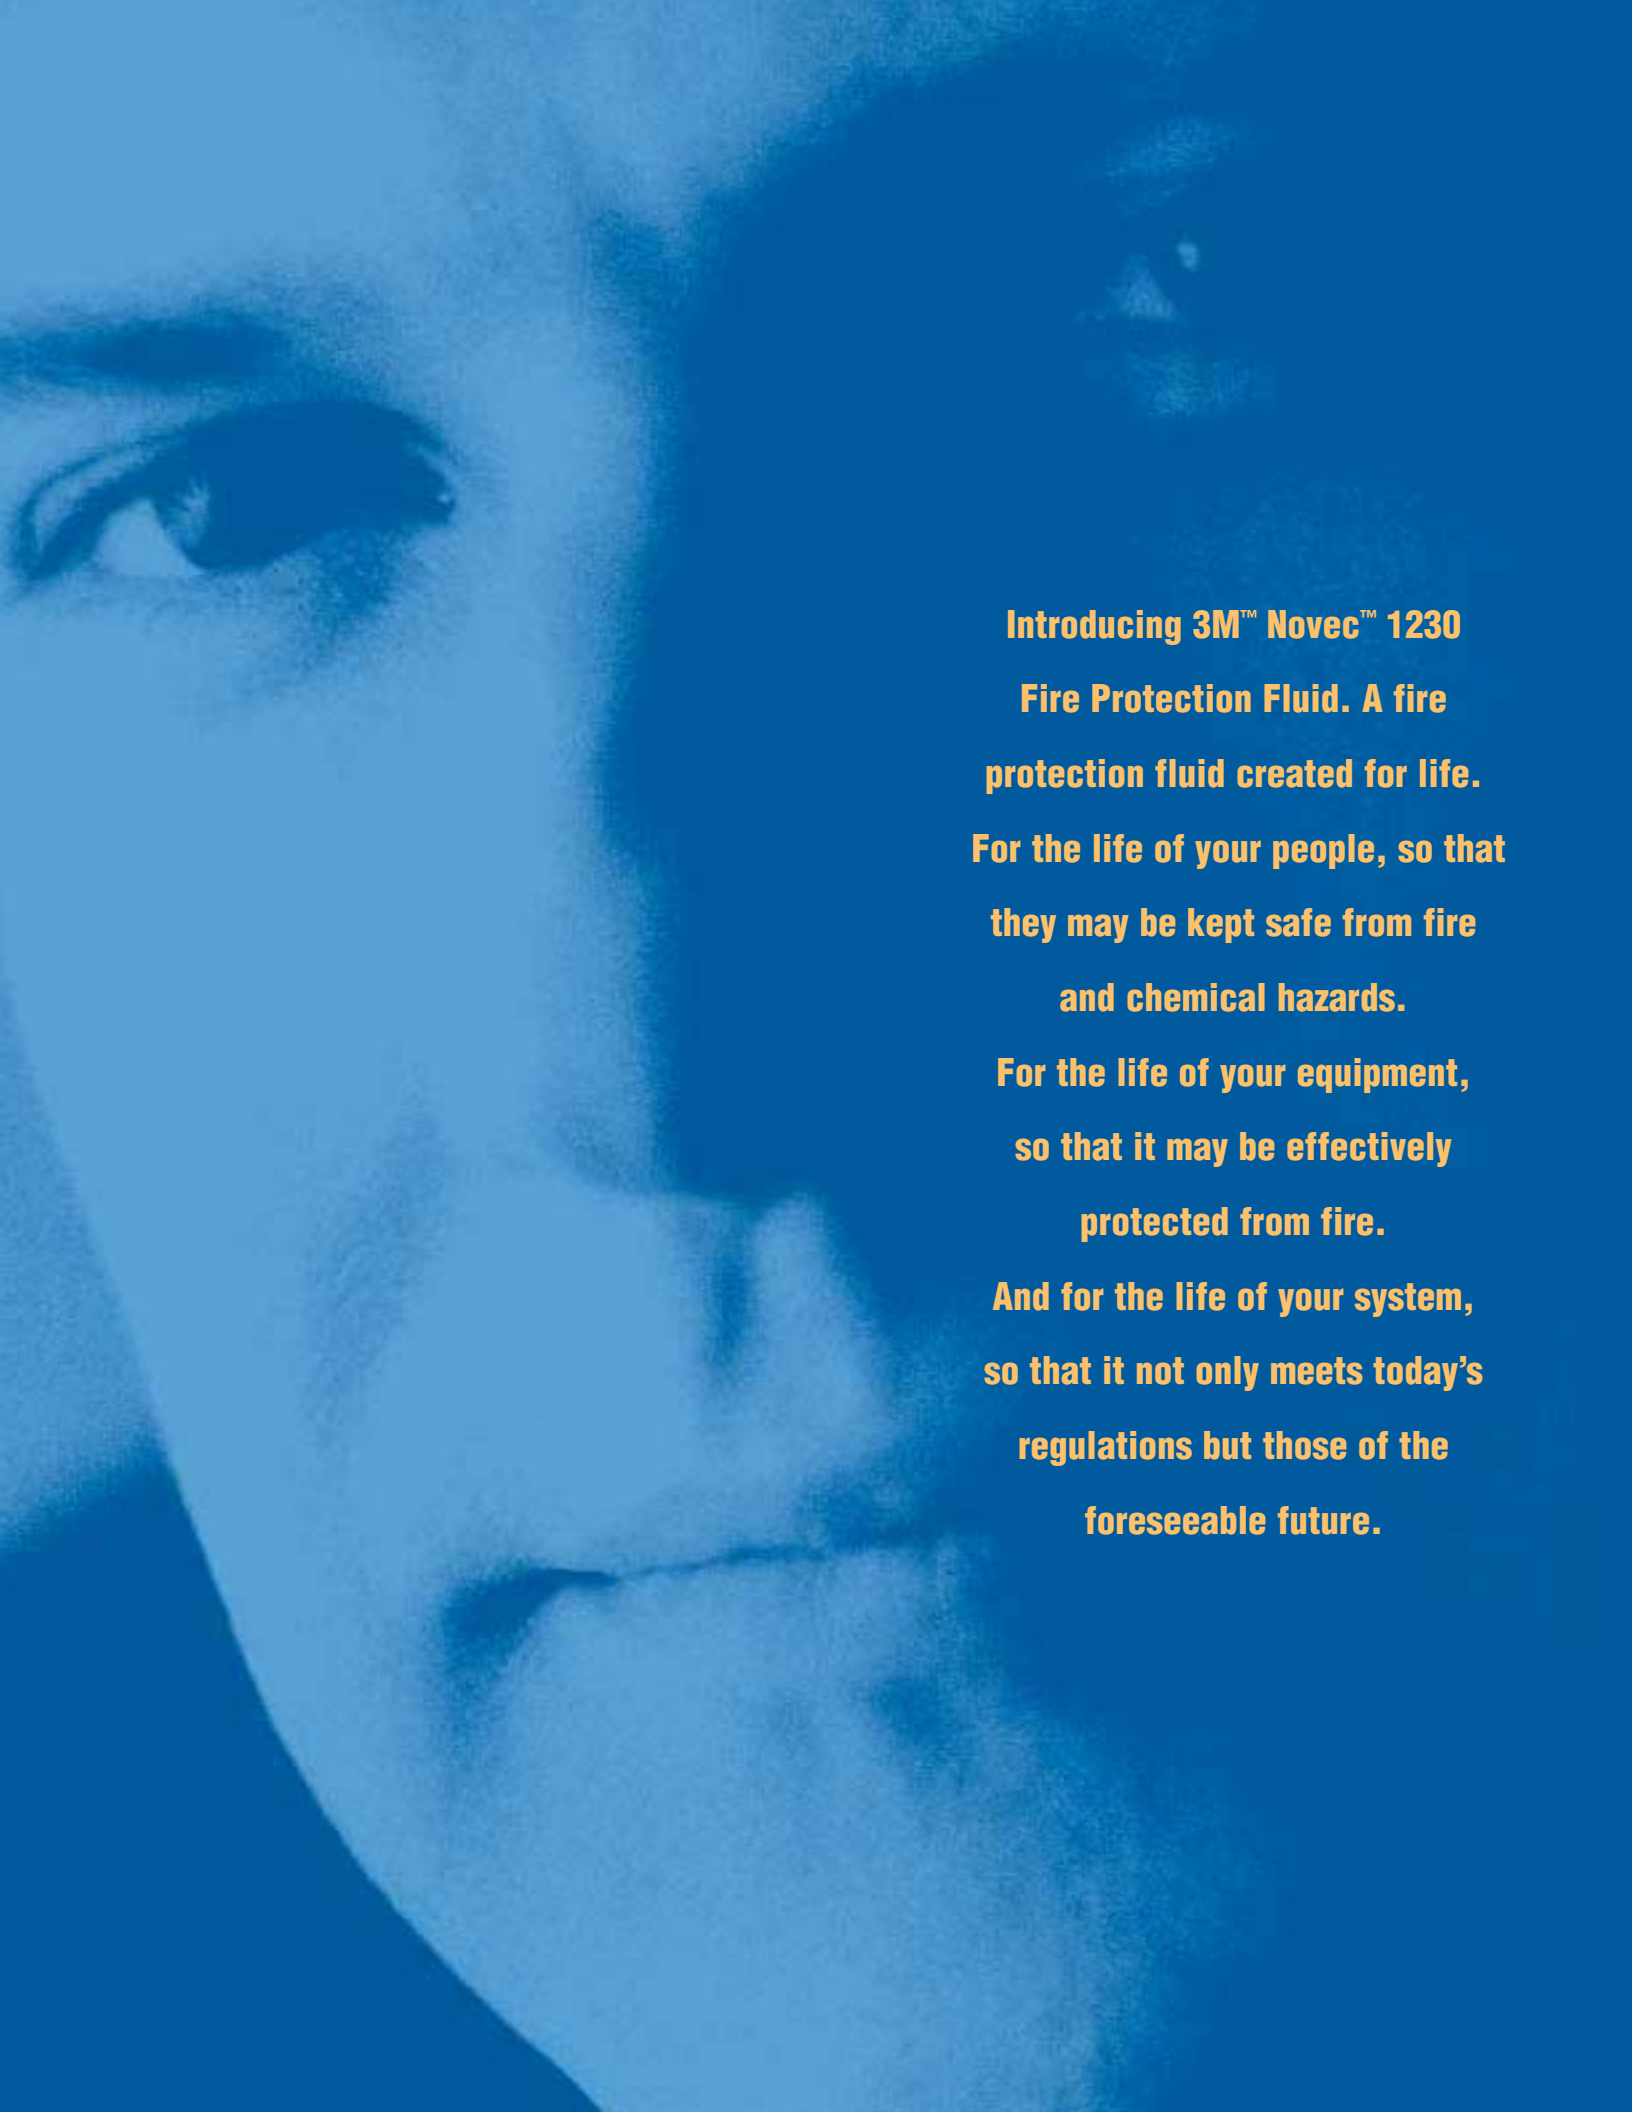

**Introducing 3M™ Novec™ 1230
Fire Protection Fluid. A fire
protection fluid created for life.
For the life of your people, so that
they may be kept safe from fire
and chemical hazards.
For the life of your equipment,
so that it may be effectively
protected from fire.
And for the life of your system,
so that it not only meets today's
regulations but those of the
foreseeable future.**

A long-term, sustainable technology.

With zero ozone depletion potential, extremely low global warming potential and short atmospheric lifetime, Novec 1230 fluid is the first halon replacement to offer a viable, long-term, sustainable technology for special hazards fire protection.

3M™ Novec™ 1230 Fire Protection Fluid Environmental Properties

| Properties | Novec 1230 | Halon 1211 | Halon 1301 | HFC-125 | HFC-227ea |
|--|------------|------------|------------|---------|-----------|
| Ozone Depletion Potential (ODP) ¹ | 0.0 | 5.1 | 12.0 | 0.0 | 0.0 |
| Global Warming Potential ² | 1 | 1300 | 6900 | 3400 | 3500 |
| Atmospheric Lifetime (Years) | 0.014 | 11 | 65 | 29 | 33 |
| SNAP (Yes/No) | Yes | N/A | N/A | Yes | Yes |

¹ World Meteorological Organization (WMO) 1998, Model-Derived Method.

² Intergovernmental Panel on Climate Change (IPCC) 2001 Method, 100 Year ITH.

The widest margin of safety.

Because its use concentration is much lower than its *No Observable Adverse Effects Level* (NOAEL), Novec 1230 fluid offers the widest margin of safety of any viable halon replacement available on the market today.

Note: Industry standards require egress from a protected enclosure prior to system discharge.



3M™ Novec™ 1230 Fire Protection Fluid Safety Margin

| Agent | Novec 1230 | Halon 1301 | HFC-125 | HFC-227ea |
|--------------------|------------------|------------|-----------|-----------|
| Use Concentration | 4-6% | 5% | 8.7-12.1% | 7.5-8.7% |
| NOAEL ³ | 10% ⁴ | 5% | 7.5% | 9% |
| Safety Margin | 67-150% | Nil | Nil | 3-20% |

³ NOAEL for cardiac sensitization.

⁴ NOAEL for acute toxicity, including cardiac sensitization.



3M™ Novec™ 1230 Fire Protection Fluid Typical Physical Properties (Not for specification purposes)

| | |
|--|--|
| Chemical formula | $\text{CF}_3\text{CF}_2\text{C}(\text{O})\text{CF}(\text{CF}_3)_2$ |
| Molecular weight | 316.04 |
| Boiling point @ 1 atm | 49.2°C (120.6°F) |
| Freezing point | -108°C (-162.4°F) |
| Density, sat. liquid, 25°C | 1.60 g/ml (99.9 lbm/ft ³) |
| Density, gas @ 1 atm, 25°C | 0.0136 g/ml (0.851 lbm/ft ³) |
| Specific volume @ 1 atm, 25°C | 0.0733 m ³ /kg (1.175 ft ³ /lb) |
| Liquid viscosity @ 0°C/25°C | 0.56/0.39 centistokes |
| Heat of vaporization @ BP | 88.0 kJ/kg (37.9 BTU/lb) |
| Solubility of H ₂ O in Novec 1230 fluid | <0.001% by wt. |
| Vapor pressure @ 25°C | 0.404 bar (5.87 psig) |
| Relative dielectric strength @ 1 atm (N ₂ =1.0) | 2.3 |

3M™ Novec™ 1230 Fire Protection Fluid Regulatory Status

| | |
|-----------|--|
| USA | TSCA: product complies with chemical notification requirements. SNAP: approved for flooding (12/20/02) and streaming (1/23/03) |
| Europe | ELINCS: product complies with chemical notification requirements |
| Canada | CDSL: product complies with chemical notification requirements |
| Korea | KECI: product complies with chemical notification requirements |
| Australia | AICS: product complies with chemical notification requirements |
| Japan | METI: product complies with chemical notification requirements |
| China | CICS: product complies with the chemical notification requirements |

All major global regulatory requirements have been addressed. Novec 1230 fluid can be supplied to meet global demand.



One fire protection fluid. So many reasons to use it.

Here is the new standard for halon replacement. Novec 1230 fluid offers a long-term, sustainable technology that has the greatest margin of safety, the lowest GWP for halocarbon alternatives, and zero ozone depletion potential.

What is Novec 1230 fluid?

Novec 1230 fluid is a fluoroketone — a proprietary 3M technology that offers a number of important advantages over conventional halon replacements.



How does it work?

Extinguishing via its cooling effect, Novec 1230 fluid works as a gas, yet it is a liquid at room temperature. Because it is not stored or shipped from the factory in pressurized cylinders, Novec 1230 fluid is **easy to handle and charge**. Novec 1230 fluid systems allow for more efficient use of space, requiring about the same number of cylinders as conventional halocarbon agents.

Where is Novec 1230 fluid used?

Novec 1230 fluid is a highly efficient fire extinguishant that **can be used for both streaming and flooding applications**. It is **ideal for special hazards**: spaces where the criticality of maintaining operation of high-value equipment is paramount. Examples include: telecommunication switch rooms, computer and electronic control rooms, hazards aboard ships, critical military applications such as engine and crew bay, and flightline protection.

What sets it apart?

Novec 1230 fluid has **zero ozone depletion potential** and the **lowest atmospheric lifetime for halocarbon alternatives: 5 days**. The closest alternative is 33 years.

It has a **Global Warming Potential of 1**, 99.9% lower than any halocarbon agent acceptable for use in occupied spaces.

Novec 1230 fluid has the **greatest margin of safety** for use in occupied spaces.

It makes **good business sense** to use Novec 1230 fluid because it is a **sustainable, long-term technology**. Not only does Novec 1230 fluid meet today's regulations but it meets those of the foreseeable future.

Novec 1230 fluid is supported by global sales, technical and customer service resources, with fully-staffed technical service laboratories in the U.S., Europe, Japan and Southeast Asia.



Important notice to purchaser:

The information in this publication is intended for persons with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. The Material Safety Data Sheet (MSDS), Material Toxicity Summary Sheet (MTSS) and other product literature should be read and understood before using the 3M product. The information in this publication is based on tests that we believe are reliable. Your results may vary due to differences in test types and conditions. You must evaluate and determine whether the 3M product is suitable for your intended application. Since conditions of product use are outside of our control and vary widely, the following is made in lieu of all expressed and implied warranties (including the implied warranties of merchantability and fitness for a particular purpose): Except where prohibited by law, 3M's only obligation, and your only remedy, is replacement or, at 3M's option, refund of the original purchase price of product that is shown to have been defective when you received it. In no case will 3M be liable for any direct, indirect, special, incidental, or consequential damages (including, without limitation, lost profits, goodwill, and business opportunity) based on breach of warranty, condition or contract, negligence, strict liability, or any other legal or equitable theory.



For more information on 3M™ Novec™ 1230 Fire Protection Fluid, contact:

United States

3M Specialty Materials
3M Center Building 223-6S-04
St. Paul, MN 55144-1000
800 810 8513
800 810 8514 (Fax)

Canada

3M Canada Company
Specialty Materials
P.O. Box 5757
London, Ontario
N6A 4T1
800 364 3577

Europe

3M Specialty Materials
3M Belgium N.V.
Haven 1005, Canadastraat 11
B-2070 Zwijndrecht
32 3 250 7826 or
32 3 250 7874

Japan

Sumitomo 3M Limited
33-1, Tamagawadai 2-chome
Setagaya-ku, Tokyo
158-8583 Japan
813 3709 8250

Great Britain

3M United Kingdom PLC
3M House - P.O. Box 1
Market Place
Bracknell, Berkshire RG12 1JU
England, United Kingdom
01344-858000

Asia Pacific and Latin America

Call (U.S.) **651 736 7123**
800 810 8514 (Fax)



3M Performance Materials Division

3M Center Building 223-6S-04
St. Paul, MN 55144-1000

www.3m.com/novec1230fluid