

Titan 1230 Nitrogen Charging Hose


Nitrogen Pilot Hose

Part Number	NCR-PH400	NCR-PH700	NCR-PH500
Connection	2 x M12 x 1.5	2 x M12 x 1.5	2 x M12 x 1.5
Length	400 mm / 15.75"	700 mm / 27.56"	500 mm / 19.69"
Bending Radius	75 mm / 2.95"	75 mm / 2.95"	75 mm / 2.95"
Nominal Diameter	DN 6	DN 6	DN 6
Working Pressure	400 bar / 5800 psi	400 bar / 5800 psi	400 bar / 5800 psi
Burst Pressure	1600 bar / 23200 psi	1600 bar / 23200 psi	1600 bar / 23200 psi
Standard	EN 857 2 SC	EN 857 2 SC	EN 857 2 SC
Conformity	VdS UL	VdS UL	VdS UL

MATERIAL

- Connection Galvanized Steel
- Hose Inner Layer Oil resistant synthetic rubber
- Hose Insert Two high tensile steel wire braided inserts
- Hose Outer Layer Oil resistant and weatherproof synthetic rubber

The Nitrogen Pilot Hose is used to build up the pilot line, e.g. for the connection of the several release devices and/or for the connection of the Nitrogen Valve to the Release Device.

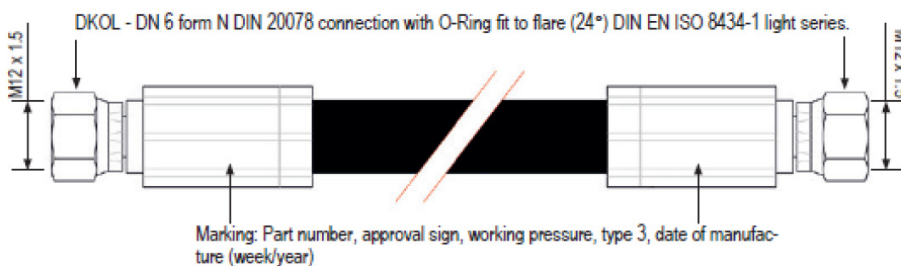

FOR USE BY ARCHITECTS AND ENGINEERS