

# Titan 1230 Nitrogen Charging Hose

Nitrogen Charging Hose - 3/4"


<b>Part Number</b>	<b>NCR-FH1000</b>
<b>Nominal Diameter</b>	19.05 mm / 3/4 in.
<b>Connection Thread Inlet</b>	W21.8 x 1/14" • G3/4"
<b>Length</b>	1016 mm / 40 in.
<b>Working Pressure</b>	280 bar / 4000 psi
<b>Burst Pressure</b>	1100 bar / 16000 psi
<b>Bending Radius</b>	180 mm / 7 in.
<b>Conformity</b>	UL

## MATERIAL

- Connection Galvanized Steel
- Hose Inner Layer Oil resistant synthetic rubber
- Hose Insert Two high tensile steel wire braided inserts
- Hose Outer Layer Oil resistant and weatherproof synthetic rubber

The Nitrogen Charging Hose Is Used For The Connection Of The Nitrogen Charging Cylinder To The Agent Cylinder.

The Nitrogen Charging Hose Is Provided With One W21.8 X 1/14" Nut And One G3/4" Nut. The Nuts Are Protected With Plastic Caps, Which Must Be Removed Before Installation.

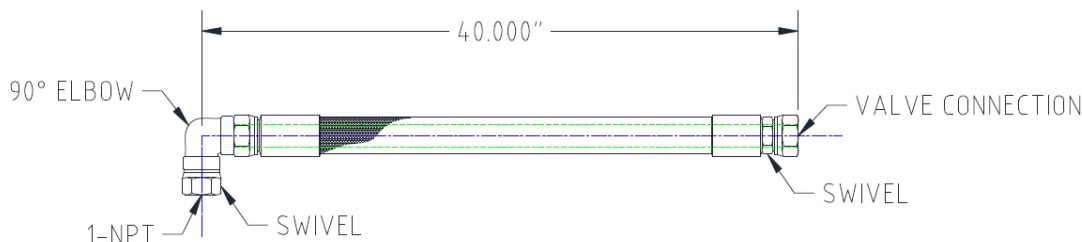

**FOR USE BY ARCHITECTS AND ENGINEERS**

DATA SHEET

FORM NO. 04-NOV-0133

ISSUE NO. A

DATE. 15/04/2016